



ENVIRONMENTAL PRODUCT DECLARATION

*In accordance with ISO 14025 and
EN 15804:2012+A2:2019 for*

**CONPLAN ECO R
UNIPLAN RAPID
CONPLAN RAPID**



Publisher: The Norwegian EPD Foundation
Registration number: NEPD-2840-1528-EN

An EPD should provide current information and may be updated if conditions change. The stated validity is, therefore, subject to the continued registration and publication at www.environdec.com.”

Programme:
**The International
EPD® System;**
www.environdec.com

Programme
operator:
EPD International AB

EPD registration
number:
S-P-03692

Publication
date:
2021-05-05

Valid until:
2026-05-04

Geographical
scope:
International




1. COMPANY DESCRIPTION / GOAL & SCOPE

Founded in 1937 in Milan, Italy, Mapei produces adhesives and complementary products for laying all types of floor, wall and coating materials, and also specializes in other chemical products used in the building industry, such as waterproofing products, specialty mortars, admixtures for concrete, cement additives, products for underground constructions and for the restoration of concrete and historical buildings.

There are currently 90 subsidiaries in the Mapei Group, with a total of 83 production facilities located around the world in 36 different countries and in 5 different continents. Mapei also has 31 central laboratories. Most locations are ISO 9001 and ISO 14001 or EMAS-certified.

Mapei invests 12% in its company's total work-force and 5% of its turnover in Research & Development; in particular, 70% of its R&D efforts are directed to develop eco-sustainable and environmentally friendly products, which give important contribution to all major green rating systems for eco-sustainable buildings such as LEED and BREEAM.

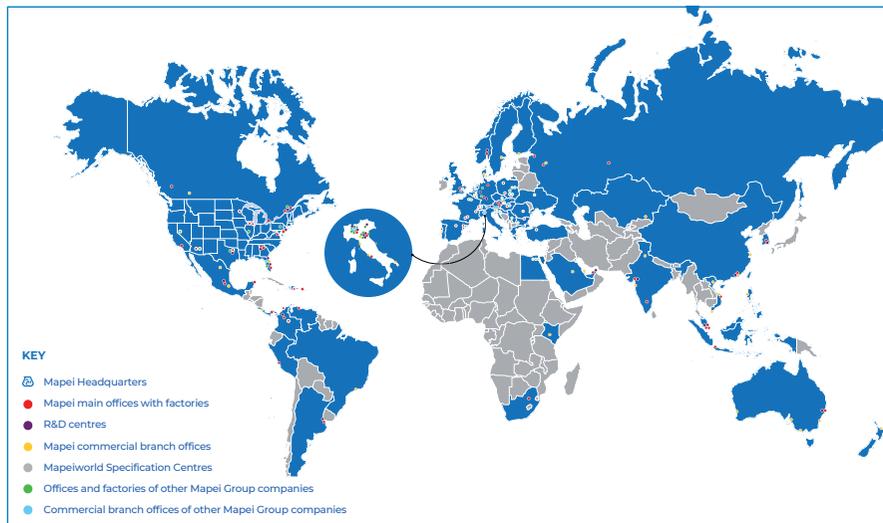

LEED V4 is the latest version of Leadership in Environmental and Energy Design, an American protocol that enables buildings to be certified as eco-sustainable according to parameters and credits described in the most widely adopted green building criteria in the world. Issued by the GBC US, it is mandatory for all LEED projects registered after October 2016.

Numerous changes have been made to the previous version: Mapei products play a part in obtaining important credits thanks to their EPD's (type III environmental declarations) and their products with very low emission of VOC.

Launched in the UK in 1990, **BREEAM** (BRE Environmental Assessment Method) is a protocol for sustainable building practices adopted mainly in the United Kingdom and in Scandinavian countries with the version BREEAM NOR.

By adopting this protocol, thanks to their EPD's and very low emission of VOC, Mapei products help towards obtaining relative credits.

Furthermore, Mapei has developed a sales and technical service network with offices all over the world and offers an efficient Technical Assistance Service that is valued by architects, engineers, contractors and owners.

Mapei Nordic production site is located in Sagstua, Norway. The production site consists of 5 factories: two factories for powder-based products, two factories for liquid admixtures and one factory for thermosetting plastic-based products.

The total size of the buildings is 24.000 sqm. The energy in these factories are provided from water electricity, geothermal heating and remaining approximately 10 % heated by bio oil.

Mapei Nordic focuses both on energy and on logistic optimisation, as for example the systematic Lean based improvement work. With 60 – 80 trailers per day, and 600 transport lines, requires Mapei to work actively on optimizing our logistic process.

The goal of the study is to provide necessary data and documentation to produce an EPD according to the requirements of PCR Environdec (version 1.11, 2021-02-05) under EN 15804:2012+A2:2019 and to have more comprehension about the environmental impacts related to **Conplan Eco R**, **Uniplan Rapid** and **Conplan Rapid** manufactured in Mapei AS located in Sagstua (NO), including packaging of the finished products.

Target audiences of the study are customers and other parties with an interest in the environmental impacts of **Conplan Eco R**, **Uniplan Rapid** and **Conplan Rapid**. This analysis shall not support comparative assertions intended to be disclosed to the public.

2. PRODUCT DESCRIPTION

Conplan ECO R is a fast curing, cementitious selflevelling floor screed for use on concrete substrates. It is supplied as a dry mortar consisting of cement, sand up to 0.5 mm, plasticizing and bond enhancing admixtures.

Uniplan Rapid is a fibre-reinforced, fast-setting, cementitious, pumpable screed compound for levelling concrete floors, and wooden floors that are sufficiently rigid.

Conplan Rapid is a fast curing, cementitious selflevelling floor screed for use on concrete substrates. It is supplied as a dry mortar and is composed of cement, sand with a grain size of up to 0.5 mm, and plasticising and bonding-enhancing admixtures. It can be

used in thicknesses of 3–30 mm per layer.

The products are CE approved and classified as CT-C25-F7 in accordance with EN 13813.

Conplan Eco R is available in 20 kg multiply-bag, 1200 kg big bag and bulk, while **Uniplan Rapid** and **Conplan Rapid** are available in 1200 kg big bag and bulk.

For more information about the products see the TDS (Technical Data Sheet) on Mapei AS website (www.mapei.com/NO).

3. CONTENT DECLARATION

The main components and ancillary materials of the product included in this EPD are the following:

Table 1: Composition referred to 1 kg of finished product with packaging

Materials	Percentage (%) by mass
Inorganic binders	15 – 30%
Organic binders	< 3 %
Fillers	60 – 80%
Additives	< 2 %
Packaging	Percentage (%) by mass
Paper bag (CA/PE/CA)	< 0,5%
Wrapping material (LD-PE)	< 0,08%
Pallet (WOOD)	< 2,5%

The products contain in a concentration higher than 0,1% (by unit weight) neither carcinogenic substances nor substances of very high concern (SVHC) on the REACH Candidate List published by the European Chemicals Agency.

4. DECLARED UNIT AND REFERENCE SERVICE LIFE

The declared unit is 1 kg of finished product with packaging.

Due to the selected system boundary, the reference service life of the product is not specified.

5. SYSTEM BOUNDARIES AND ADDITIONAL TECHNICAL INFORMATION

The approach is “cradle to gate with modules C1–C4 and module D” (A1–A3 + C + D):

- A1, A2, A3 (Product stage): extraction and processing of raw materials and packaging (A1), transportation up to the factory gate (A2), manufacturing of the finished product (A3);
- C1, C2, C3, C4 (End of Life stage): de-construction/demolition (C1), transport to waste processing (C2), waste processing for reuse, recovery and/or recycling (C3), disposal (C4);
- D (Resource recovery stage): reuse, recovery and/or recycling potentials, expressed as net impacts and benefit.

Table 2: System boundaries

	Product stage			Construction process stage		Use stage							End of life stage				Resource recovery stage	
	Raw material supply	Transport	Manufacturing	Transport	Construction installation	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal	Reuse-Recovery-Recycling-potential	
Module	A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D	
Modules declared	X	X	X	MND	MND	MND	MND	MND	MND	MND	MND	MND	X	X	X	X	X	
Geography	EU, NO	EU, NO	NO	-	-	-	-	-	-	-	-	-	EU	EU	EU	EU	EU	
Specific data	> 90%					-	-	-	-	-	-	-	-	-	-	-	-	
Variation – products	Not-relevant					-	-	-	-	-	-	-	-	-	-	-	-	-
Variation – sites	Not-relevant					-	-	-	-	-	-	-	-	-	-	-	-	-

MND: Module Not Declared

A brief description of production process is the following:

The production process starts from raw materials, that are purchased from external and intercompany suppliers and stored in the plant. Bulk raw materials are stored in specific silos and added automatically in the production mixer, according to the formula of the product. Other raw materials, supplied in bags, big bags or tanks, are stored in the warehouse and added automatically or manually in the mixer. The production is a discontinuous process, in which all the components are mechanically mixed in batches. The semi-finished product is then packaged, put on wooden pallets and stored in the finished products warehouse. The quality of final products is controlled before the sale.

Figure 1: Production process detail - © Photo Halvor Gudim



6. CUT-OFF RULES AND ALLOCATION

Criteria for the exclusion of inputs and outputs (cut-off rules) in the LCA, information modules and any additional information are intended to support an efficient calculation procedure. They are not applied in order to hide data. Cut-off criteria, where applied, are described in Table 3

Table 3: Cut-off criteria

Process excluded from study	Cut-off criteria	Quantified contribution from process
A3: production (auxiliary materials)	Less than 10^{-5} kg/kg of finished product	Sensitivity study demonstrates a relative contribution lower than 0,5%
A3: waste and particle emission	Less than 10^{-4} kg/kg of finished product	Sensitivity study demonstrates a relative contribution lower than 0,5%

For the allocation procedure and principles consider the following table (Table 4):

Table 4: Allocation procedure and principles

Module	Allocation Principle
A1	All data are referred to 1 kg of product A1: electricity is allocated to the specific production line
A3	All data are referred to 1 kg of packaged product A3-wastes: all data are allocated to the whole production plant

7. ENVIRONMENTAL PERFORMANCE AND INTERPRETATION



GWP

Climate change

GWPTotal - Global Warming Potential refers to the emission/presence of GHGs (greenhouse gases) in the atmosphere (mainly CO₂, N₂O, CH₄) which contribute to the increase in the temperature of the planet.

GWP-total considers:

- GWP-fossil
- GWP-biogenic
- GWP-LULUC (land use and land use change)



ODP

Ozone Depletion

Ozone Depletion Potential refers to the degradation of the stratospheric layer of the ozone involved in blocking the UV component of sunrays. Depletion is due to particularly reactive components that originate from chlorofluorocarbon (CFC) or chlorofluoromethane (CFM).



AP

Acidification

Acidification Potential refers to the emission of specific acidifying substances (i.e. NO_x, SO_x) in the air. These substances decrease the pH of the rainfall with predictable damages to the ecosystem.



EP

Eutrophication

Eutrophication Potential refers to the nutrient enrichment, which determines unbalance in ecosystems and causes the death of the fauna and decreased biodiversity in flora.

It considers:

- EP-freshwater: aquatic freshwater
- EP-marine: aquatic marine
- EP-terrestrial



POCP

Photochemical ozone formation

The Photochemical Ozone Creation Potential is the ozone formation in low atmosphere. This is quite common in the cities where a great amount of pollutants (like VOC and NO_x) are emitted every day (industrial emissions and vehicles). It is mainly diffused during the summertime.



**ADP
minerals&metals**

Depletion of abiotic resources – minerals and metals

Abiotic Depletion Potential elements refers to the depletion of the mineral resources.



ADP - fossil

Depletion of abiotic resources – fossil fuel

Abiotic Depletion Potential fossil fuel refers to the depletion of the fossil fuel resources.



WDP

Water use

It expresses the potential deprivation of water, that consists in not having the water needs satisfied.

The following tables show the environmental impacts for the products considered according to the requirements of EN15804:2012+A2:2019. The results are referred to the declared unit (see § 4). The additional environmental indicators are not declared.

CONPLAN ECO R

(1 kg of product in multiply-bag)

Table 5: Conplan Eco R: Potential environmental impact – mandatory indicators according to EN 15804 referred to 1 kg of product in multiply-bag

Indicator	Unit	A1-A3	C1	C2	C3	C4	D
GWP_{TOTAL}	(kg CO ₂ eq.)	2,22E-01	2,78E-03	7,05E-03	1,88E-03	4,53E-03	-
GWP _{FOSSIL}	(kg CO ₂ eq.)	2,52E-01	2,74E-03	7,00E-03	1,87E-03	4,65E-03	-
GWP _{BIOGENIC}	(kg CO ₂ eq.)	-3,05E-02	3,74E-05	-8,34E-06	6,09E-07	-1,35E-04	-
GWP _{LULUC}	(kg CO ₂ eq.)	2,21E-04	7,47E-06	5,72E-05	1,29E-05	1,37E-05	-
ODP	(kg CFC 11 eq.)	7,47E-10	1,07E-16	1,38E-18	4,84E-18	1,81E-17	-1,21E-11
AP	(mol H ⁺ eq.)	1,13E-03	3,62E-06	7,43E-06	1,81E-05	3,31E-05	-
EP _{FRESHWATER}	(kg (PO ₄) ³⁻ eq.)	3,64E-06	1,24E-08	2,08E-08	5,33E-09	7,80E-09	-5,91E-6
EP _{MARINE}	(kg N eq.)	1,93E-04	1,15E-06	2,36E-06	8,86E-06	8,59E-06	-
EP _{TERRESTRIAL}	(mol N eq.)	2,14E-03	1,21E-05	2,81E-05	9,74E-05	9,44E-05	-
POCP	(kg NMVOC eq.)	5,82E-04	3,10E-06	6,40E-06	2,58E-05	2,60E-05	-
ADP _{MINERALS&METALS}	(kg Sb eq.)	3,35E-08	1,22E-09	6,21E-10	2,05E-09	4,39E-10	-6,27E-9
ADP _{FOSSIL}	(MJ)	2,58E+00	3,94E-02	9,33E-02	3,65E-02	6,17E-02	-5,06E-1
WDP	(m ³ world eq.)	2,27E-02	8,34E-04	6,50E-05	3,49E-04	4,99E-04	-

GWP_{TOTAL}: Global Warming Potential total; **GWP_{FOSSIL}**: Global Warming Potential fossil fuels; **GWP_{BIOGENIC}**: Global Warming Potential biogenic; **GWP_{LULUC}**: Global Warming Potential land use and land use change; **ODP**: Depletion Potential of the stratospheric Ozone layer; **AP**: Acidification Potential; **EP_{FRESHWATER}**: Eutrophication Potential, freshwater; **EP_{MARINE}**: Eutrophication Potential, marine; **EP_{TERRESTRIAL}**: Eutrophication Potential, terrestrial; **POCP**: Formation potential of tropospheric ozone; **ADP_{MINERALS&METALS}**: Abiotic Depletion Potential for non-fossil resources; **ADP_{FOSSIL}**: Abiotic Depletion Potential for fossil resources; **WDP**: Water Deprivation Potential.

Table 6: Conplan Eco R: Potential environmental impact – additional mandatory and voluntary indicators referred to 1 kg of product in multiply-bag

Indicator	Unit	A1-A3	C1	C2	C3	C4	D
GWP-GHG	(kg CO ₂ eq.)	2,48E-01	2,68E-03	6,91E-03	1,82E-03	4,56E-03	-3,69E-2

GWP-GHG: The indicator includes all greenhouse gases included in GWP-total but excludes biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product. This indicator is thus equal to the GWP indicator originally defined in EN 15804:2012+A1:2013.

Table 7: Conplan Eco R: Use of resources referred to 1 kg of product in multiply-bag

Indicator	Unit	A1-A3	C1	C2	C3	C4	D
PERE	MJ	2,72E-01	2,79E-02	5,37E-03	2,69E-03	8,31E-03	-
PERM	MJ	4,47E-01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	-
PERT	MJ	7,19E-01	2,79E-02	5,37E-03	2,69E-03	8,31E-03	-8,34E-2
PENRE	MJ	2,56E+00	3,94E-02	9,36E-02	3,65E-02	6,17E-02	-
PENRM	MJ	2,88E-02	0,00E+00	0,00E+00	0,00E+00	0,00E+00	-
PENRT	MJ	2,59E+00	3,94E-02	9,36E-02	3,65E-02	6,17E-02	-6,19E-1
SM	kg	1,00E-02	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
RSF	MJ	8,80E-02	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
NRSF	MJ	1,07E-01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
FW	m ³	8,57E-04	2,25E-05	6,15E-06	1,01E-05	1,52E-05	-

PERE: Use of renewable primary energy excluding renewable primary energy resources used as raw materials; **PERM:** Use of renewable primary energy resources used as raw materials; **PERT:** Total use of renewable primary energy resources (primary energy and primary energy resources used as raw materials); **PENRE:** Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials; **PENRM:** Use of non-renewable primary energy resources used as raw materials; **PENRT:** Total use of non-renewable primary energy resources (primary energy and primary energy resources used as raw materials); **SM:** Use of secondary material; **RSF:** Use of renewable secondary fuels; **NRSF:** Use of non-renewable secondary fuels; **FW:** Net use of fresh water.

Table 8: Conplan Eco R: Waste production and output flows referred to 1 kg of product in multiply-bag

Indicator	Unit	A1-A3	C1	C2	C3	C4	D
HWD	kg	4,28E-05	1,85E-11	4,93E-12	2,04E-12	6,55E-12	-
NHWD	kg	2,53E-02	4,17E-05	1,47E-05	9,78E-06	3,08E-01	-
RWD	kg	2,54E-05	1,40E-06	1,70E-07	4,71E-07	6,48E-07	-
Components for re-use	kg	-	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Materials for recycling	kg	-	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Materials for energy recovery	kg	-	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Exported energy, electricity	MJ	-	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Exported energy, thermal	MJ	-	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00

HWD: Hazardous waste disposed; **NHWD:** Non-Hazardous waste disposed; **RWD:** Radioactive waste disposed

Table 9: Conplan Eco R: Information on biogenic carbon content at the factory gate referred to 1 kg of product in multiply-bag

Biogenic Carbon Content	Unit	Quantity
Biogenic carbon content in product	kg C	0,00E+00
Biogenic carbon content in packaging	kg C	1,02E-02

UNIPLAN RAPID

(1 kg of product in bulk)

Table 10: Uniplan Rapid: Potential environmental impact – mandatory indicators according to EN 15804 referred to 1 kg of product in bulk

Indicator	Unit	A1-A3	C1	C2	C3	C4	D
GWP_{TOTAL}	(kg CO ₂ eq.)	2,43E-01	2,71E-03	6,88E-03	1,84E-03	4,42E-03	-
GWP _{FOSSIL}	(kg CO ₂ eq.)	2,45E-01	2,67E-03	6,83E-03	1,82E-03	4,54E-03	-
GWP _{BIOGENIC}	(kg CO ₂ eq.)	-2,01E-03	3,65E-05	-8,14E-06	5,95E-07	-1,32E-04	-
GWP _{LULUC}	(kg CO ₂ eq.)	2,07E-04	7,29E-06	5,59E-05	1,26E-05	1,33E-05	-
ODP	(kg CFC 11 eq.)	7,31E-10	1,05E-16	1,35E-18	4,73E-18	1,76E-17	-1,21E-11
AP	(mol H ⁺ eq.)	1,09E-03	3,53E-06	7,25E-06	1,76E-05	3,23E-05	-
EP _{FRESHWATER}	(kg (PO ₄) ³⁻ eq.)	3,52E-06	1,21E-08	2,03E-08	5,20E-09	7,62E-09	-5,91E-6
EP _{MARINE}	(kg N eq.)	1,82E-04	1,12E-06	2,30E-06	8,65E-06	8,39E-06	-
EP _{TERRESTRIAL}	(mol N eq.)	2,01E-03	1,18E-05	2,74E-05	9,51E-05	9,22E-05	-
POCP	(kg NMVOC eq.)	5,52E-04	3,03E-06	6,24E-06	2,52E-05	2,54E-05	-
ADP _{MINERALS&METALS}	(kg Sb eq.)	3,18E-08	1,19E-09	6,06E-10	2,00E-09	4,28E-10	-6,27E-9
ADP _{FOSSIL}	(MJ)	2,44E+00	3,85E-02	9,10E-02	3,56E-02	6,02E-02	-5,06E-1
WDP	(m ³ world eq.)	2,07E-02	8,14E-04	6,34E-05	3,41E-04	4,87E-04	-

GWP_{TOTAL}: Global Warming Potential total; **GWP_{FOSSIL}**: Global Warming Potential fossil fuels; **GWP_{BIOGENIC}**: Global Warming Potential biogenic; **GWP_{LULUC}**: Global Warming Potential land use and land use change; **ODP**: Depletion Potential of the stratospheric Ozone layer; **AP**: Acidification Potential; **EP_{FRESHWATER}**: Eutrophication Potential, freshwater; **EP_{MARINE}**: Eutrophication Potential, marine; **EP_{TERRESTRIAL}**: Eutrophication Potential, terrestrial; **POCP**: Formation potential of tropospheric ozone; **ADP_{MINERALS&METALS}**: Abiotic Depletion Potential for non-fossil resources; **ADP_{FOSSIL}**: Abiotic Depletion Potential for fossil resources; **WDP**: Water Deprivation Potential.

Table 11: Uniplan Rapid: Potential environmental impact – additional mandatory and voluntary indicators referred to 1 kg of product in bulk

Indicator	Unit	A1-A3	C1	C2	C3	C4	D
GWP-GHG	(kg CO ₂ eq.)	2,41E-01	2,62E-03	6,74E-03	1,78E-03	4,45E-03	-3,69E-2

GWP-GHG: The indicator includes all greenhouse gases included in GWP-total but excludes biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product. This indicator is thus equal to the GWP indicator originally defined in EN 15804:2012+A1:2013.

Table 12: Uniplan Rapid: Use of resources referred to 1 kg of product in bulk

Indicator	Unit	A1-A3	C1	C2	C3	C4	D
PERE	MJ	3,50E-01	2,73E-02	5,24E-03	2,62E-03	8,11E-03	-
PERM	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	-
PERT	MJ	3,50E-01	2,73E-02	5,24E-03	2,62E-03	8,11E-03	-8,34E-2
PENRE	MJ	2,44E+00	3,85E-02	9,14E-02	3,56E-02	6,02E-02	-
PENRM	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	-
PENRT	MJ	2,44E+00	3,85E-02	9,14E-02	3,56E-02	6,02E-02	-6,19E-1
SM	kg	1,00E-02	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
RSF	MJ	8,80E-02	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
NRSF	MJ	1,07E-01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
FW	m ³	8,01E-04	2,20E-05	6,00E-06	9,81E-06	1,49E-05	-

PERE: Use of renewable primary energy excluding renewable primary energy resources used as raw materials; **PERM:** Use of renewable primary energy resources used as raw materials; **PERT:** Total use of renewable primary energy resources (primary energy and primary energy resources used as raw materials); **PENRE:** Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials; **PENRM:** Use of non-renewable primary energy resources used as raw materials; **PENRT:** Total use of non-renewable primary energy resources (primary energy and primary energy resources used as raw materials); **SM:** Use of secondary material; **RSF:** Use of renewable secondary fuels; **NRSF:** Use of non-renewable secondary fuels; **FW:** Net use of fresh water.

Table 13: Uniplan Rapid: Waste production and output flows referred to 1 kg of product in bulk

Indicator	Unit	A1-A3	C1	C2	C3	C4	D
HWD	kg	3,66E-05	1,81E-11	4,81E-12	1,99E-12	6,39E-12	-
NHWD	kg	2,51E-02	4,07E-05	1,43E-05	9,54E-06	3,00E-01	-
RWD	kg	2,23E-05	1,37E-06	1,66E-07	4,60E-07	6,32E-07	-
Components for re-use	kg	-	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Materials for recycling	kg	-	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Materials for energy recovery	kg	-	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Exported energy, electricity	MJ	-	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Exported energy, thermal	MJ	-	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00

HWD: Hazardous waste disposed; **NHWD:** Non-Hazardous waste disposed; **RWD:** Radioactive waste disposed

Table 14: Uniplan Rapid: Information on biogenic carbon content at the factory gate referred to 1 kg of product in bulk

Biogenic Carbon Content	Unit	Quantity
Biogenic carbon content in product	kg C	0,00E+00
Biogenic carbon content in packaging	kg C	0,00E-00

CONPLAN RAPID

(1 kg of product in bulk)

Table 15: Conplan Rapid: Potential environmental impact – mandatory indicators according to EN 15804 referred to 1 kg of product in bulk

Indicator	Unit	A1-A3	C1	C2	C3	C4	D
GWP_{TOTAL}	(kg CO ₂ eq.)	2,42E-01	2,71E-03	6,88E-03	1,84E-03	4,42E-03	-
GWP _{FOSSIL}	(kg CO ₂ eq.)	2,44E-01	2,67E-03	6,83E-03	1,82E-03	4,54E-03	-
GWP _{BIOGENIC}	(kg CO ₂ eq.)	-2,01E-03	3,65E-05	-8,14E-06	5,95E-07	-1,32E-04	-
GWP _{LULUC}	(kg CO ₂ eq.)	2,07E-04	7,29E-06	5,59E-05	1,26E-05	1,33E-05	-
ODP	(kg CFC 11 eq.)	7,46E-10	1,05E-16	1,35E-18	4,73E-18	1,76E-17	-1,21E-11
AP	(mol H ⁺ eq.)	1,09E-03	3,53E-06	7,25E-06	1,76E-05	3,23E-05	-
EP _{FRESHWATER}	(kg (PO ₄) ³⁻ eq.)	3,56E-06	1,21E-08	2,03E-08	5,20E-09	7,62E-09	-5,91E-6
EP _{MARINE}	(kg N eq.)	1,82E-04	1,12E-06	2,30E-06	8,65E-06	8,39E-06	-
EP _{TERRESTRIAL}	(mol N eq.)	2,01E-03	1,18E-05	2,74E-05	9,51E-05	9,22E-05	-
POCP	(kg NMVOC eq.)	5,51E-04	3,03E-06	6,24E-06	2,52E-05	2,54E-05	-
ADP _{MINERALS&METALS}	(kg Sb eq.)	3,22E-08	1,19E-09	6,06E-10	2,00E-09	4,28E-10	-6,27E-9
ADP _{FOSSIL}	(MJ)	2,42E+00	3,85E-02	9,10E-02	3,56E-02	6,02E-02	-5,06E-1
WDP	(m ³ world eq.)	2,07E-02	8,14E-04	6,34E-05	3,41E-04	4,87E-04	-

GWP_{TOTAL}: Global Warming Potential total; **GWP_{FOSSIL}**: Global Warming Potential fossil fuels; **GWP_{BIOGENIC}**: Global Warming Potential biogenic; **GWP_{LULUC}**: Global Warming Potential land use and land use change; **ODP**: Depletion Potential of the stratospheric Ozone layer; **AP**: Acidification Potential; **EP_{FRESHWATER}**: Eutrophication Potential, freshwater; **EP_{MARINE}**: Eutrophication Potential, marine; **EP_{TERRESTRIAL}**: Eutrophication Potential, terrestrial; **POCP**: Formation potential of tropospheric ozone; **ADP_{MINERALS&METALS}**: Abiotic Depletion Potential for non-fossil resources; **ADP_{FOSSIL}**: Abiotic Depletion Potential for fossil resources; **WDP**: Water Deprivation Potential.

Table 16: Conplan Rapid: Potential environmental impact – additional mandatory and voluntary indicators referred to 1 kg of product in bulk

Indicator	Unit	A1-A3	C1	C2	C3	C4	D
GWP-GHG	(kg CO ₂ eq.)	2,40E-01	2,62E-03	6,74E-03	1,78E-03	4,45E-03	-3,69E-2

GWP-GHG: The indicator includes all greenhouse gases included in GWP-total but excludes biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product. This indicator is thus equal to the GWP indicator originally defined in EN 15804:2012+A1:2013.

Table 17: Conplan Rapid: Use of resources referred to 1 kg of product in bulk

Indicator	Unit	A1-A3	C1	C2	C3	C4	D
PERE	MJ	3,49E-01	2,73E-02	5,24E-03	2,62E-03	8,11E-03	-
PERM	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	-
PERT	MJ	3,49E-01	2,73E-02	5,24E-03	2,62E-03	8,11E-03	-8,34E-2
PENRE	MJ	2,42E+00	3,85E-02	9,14E-02	3,56E-02	6,02E-02	-
PENRM	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	-
PENRT	MJ	2,42E+00	3,85E-02	9,14E-02	3,56E-02	6,02E-02	-6,19E-1
SM	kg	1,00E-02	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
RSF	MJ	8,80E-02	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
NRSF	MJ	1,07E-01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
FW	m ³	8,01E-04	2,20E-05	6,00E-06	9,81E-06	1,49E-05	-

PERE: Use of renewable primary energy excluding renewable primary energy resources used as raw materials; **PERM:** Use of renewable primary energy resources used as raw materials; **PERT:** Total use of renewable primary energy resources (primary energy and primary energy resources used as raw materials); **PENRE:** Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials; **PENRM:** Use of non-renewable primary energy resources used as raw materials; **PENRT:** Total use of non-renewable primary energy resources (primary energy and primary energy resources used as raw materials); **SM:** Use of secondary material; **RSF:** Use of renewable secondary fuels; **NRSF:** Use of non-renewable secondary fuels; **FW:** Net use of fresh water.

Table 18: Conplan Rapid: Waste production and output flows referred to 1 kg of product in bulk

Indicator	Unit	A1-A3	C1	C2	C3	C4	D
HWD	kg	3,66E-05	1,81E-11	4,81E-12	1,99E-12	6,39E-12	-
NHWD	kg	2,51E-02	4,07E-05	1,43E-05	9,54E-06	3,00E-01	-
RWD	kg	2,19E-05	1,37E-06	1,66E-07	4,60E-07	6,32E-07	-
Components for re-use	kg	-	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Materials for recycling	kg	-	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Materials for energy recovery	kg	-	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Exported energy, electricity	MJ	-	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Exported energy, thermal	MJ	-	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00

HWD: Hazardous waste disposed; **NHWD:** Non-Hazardous waste disposed; **RWD:** Radioactive waste disposed


Table 19: Conplan Rapid: Information on biogenic carbon content at the factory gate referred to 1 kg of product in bulk

Biogenic Carbon Content	Unit	Quantity
Biogenic carbon content in product	kg C	0,00E+00
Biogenic carbon content in packaging	kg C	0,00E-00

Tables from 5 to 19 show absolute results for all the environmental categories considered.

The main contribution to almost all the environmental impacts categories in the product life cycle comes from extraction and processing of raw materials (**module A1**). Its relative contribution is over 70% in some categories (such as GWP_{TOTAL} , ADPs, WDP, ...). The production stage (**module A3**) is relevant especially for the $GWP_{BIOGENIC}$ with a negative contribution due to the packaging components. End of life stages (**modules C1 – C4**) have a minor contribution

Table 20: Some environmental impacts of Conplan Eco R, Conplan Rapid and Uniplan Rapid as average.

		 A1-A3	 C1	 C2	 C3	 C4	 TOT
CLIMATE CHANGE (total)		2,36E-01	2,74E-03	6,93E-03	1,85E-03	4,45E-03	0,252 kg CO ₂ eq.
ACIDIFICATION		1,10E-03	3,56E-06	7,31E-06	1,78E-05	3,26E-05	1,16E-03 mol H ⁺ eq.
DEPLETION OF ABIOTIC RESOURCES (fossil)		2,48	3,88E-02	9,18E-02	3,59E-02	6,07E-02	2,71 MJ
WATER USE		2,14E-02	8,20E-04	6,39E-05	4,91E-04	4,91E-04	2,31E-02 m ³ world eq.

More details about electrical mix used in this EPD, is shown below

	Data source	GWP_{TOTAL}	Unit
Electricity grid mix (NO) – 2017	Sphera database	0,0301*	kg CO ₂ -eqv/kWh

*According to CML2001 - Apr. 2013

8. DATA QUALITY

Table 21: Data quality

Dataset & Geographical reference	Database (source)	Temporary reference
A1; A3		
Inorganic Binders (NO, EU)	NEPD – 2275-1028-NO; Ecoinvent 3.6	2018
Filler (EU)	Sphera Database;	2020
Additives (EU)	Sphera Database; ecoinvent 3.6	2020
Electricity grid mix (NO)	Sphera Database	2017
Packaging components (EU)	Sphera Database; PlasticsEurope	2005 - 2020
A2		
Truck, Euro 5, 27t payload (GLO)	Sphera Database	2020
Oceanic ship (27500 DWT – GLO)	Sphera Database	2020
Rail transport cargo (363t payload capacity – GLO)	Sphera Database	2020
Diesel for transport (EU)	Sphera Database	2017
Heavy Fuel Oil (EU)	Sphera Database	2017
Electricity grid mix (EU)	Sphera Database	2017
C1 - C4		
Construction waste treatment (EU)	Sphera Database	2020
Construction waste dumping (EU)	Sphera Database	2020
Electricity grid mix (EU)	Sphera Database	2017
Truck, Euro 6, 9.3t payload (GLO)	Sphera Database	2020
Diesel for transport (EU)	Sphera Database	2017

All data included in table above refer to a period between 2005 and 2020; the most relevant ones are specific from supplier, while the others (i.e. transport and minor contribution dataset), come from European and global databases.

All dataset are not more than 10 years old according to EN 15804 §6.3.8.2 “Data quality requirements”. Primary data concern the year 2019 and represent the whole annual production.

9. REQUISITE EVIDENCE

9.1 Indication for the calculation of Module A4 (Transport from the factory to the jobsite)

In order to calculate the impact related to the transport of 1 kg of product from the factory gate (Sagstua) to the jobsite, you can use the following formula:

$$\text{Transport Impact} = EF \text{ (kg/DU)} * \text{distance (km)}$$

Table 22: The EFs are related to 1 kg of product with packaging transported with truck Euro5

Impact Category	Unit	EF (Emission Factor)
GWP_{TOTAL}	(kg CO ₂ eq.)	4,83E-05
GWP _{FOSSIL}	(kg CO ₂ eq.)	4,80E-05
GWP _{BIOGENIC}	(kg CO ₂ eq.)	-5,70E-08
GWP _{LULUC}	(kg CO ₂ eq.)	3,91E-07
ODP	(kg CFC 11 eq.)	9,45E-21
AP	(mol H ⁺ eq.)	1,44E-07
EP _{FRESHWATER}	(kg (PO ₄) ³⁻ eq.)	1,42E-10
EP _{MARINE}	(kg N eq.)	6,53E-08
EP _{TERRESTRIAL}	(mol N eq.)	7,30E-07
POCP	(kg NMVOC eq.)	1,30E-07
ADP _{MINERALS&METALS}	(kg Sb eq.)	4,24E-12
ADP _{FOSSIL}	(MJ)	6,38E-04
WDP	(m ³ world eq.)	4,44E-07

Example:

If the product is delivered from Sagstua (production plant) to Oslo (Jobsite) for around 90 km, the GWP impact result is:

$$GWP_{TOTAL} = 4,83E-05 * 90 \text{ km} = 4,35E-03 \text{ kg CO}_2\text{eq}$$

9.2 VOC EMISSIONS

Volatile Organic Compounds (VOC) special tests and evidence have been carried out on the two products, according to ISO 16000 parts 3, 6, 9 and 11 and EN 16516.

The product has been evaluated in emission chambers, in order to detect their VOC emissions after 3 and 28 days storage in the ventilated chambers, according to GEV (Gemeinschaft Emissionskontrollierte Verlegewerkstoffe, Klebstoffe und Bauprodukte e.V.) test method.

The following product meets the requirements for the emission class EMICODE® **ECT^{PLUS}**, as "very low emission", released by GEV:

- **Uniplan Rapid:** license number 9345
- **Conplan Rapid:** license number 3404
- **Conplan Eco R:** license number 13357

Next table describes the limits for the EMICODE® ECT^{PLUS} class:

Table 23: ECT^{PLUS} VOC limits

Indicator	3 days µg/m ³	28 days µg/m ³
TVOC (C6-C16)	≤ 750 µg/m ³	≤ 60 µg/m ³
TSVOC (C16-C22)		≤ 40 µg/m ³
C1A-C1B substances	Total ≤ 10 µg/m ³	Single substance ≤ 1 µg/m ³
Formaldehyde/ acetaldehyde	≤ 50 µg/m ³	
Sum of formaldehyde/acetaldehyde	≤ 50 ppb	
sum of non-assessable VOCs		≤ 40
R value		≤ 1

10. VERIFICATION AND REGISTRATION

The EPD owner has the sole ownership, liability, and responsibility for the EPD.

EPDs within the same product category but from different programmes may not be comparable. EPDs of construction products may not be comparable if they do not comply with EN 15804. For further information about comparability, see EN 15804 and ISO 14025.

CEN standard EN15804 served as the Core Product Category Rules (PCR)	
PCR:	PCR 2019:14 Construction products (EN 15804:A2), Version 1.11, 2021-02-05, UN CPC code 54
PCR review was conducted by:	The Technical Committee of the International EPD® System. See www.environdec.com/TC for a list of members. Review chair: Claudia A. Peña, University of Concepción, Chile. The review panel may be contacted via the Secretariat www.environdec.com/contact .
Independent third-party verification of the declaration and data, according to ISO 14025:2006:	<input checked="" type="checkbox"/> EPD Process Certification <input type="checkbox"/> EPD Verification
Third party verifier:	Certiquality S.r.l. Number of accreditation: 003H rev15
Accredited or approved by:	Accredia
Procedure for follow-up of data during EPD validity involves third-party verifier	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No

11. REFERENCES

- EN 13813 SCREED MATERIAL AND FLOOR SCREEDS - SCREED MATERIAL - PROPERTIES AND REQUIREMENTS
- EN 15804: SUSTAINABILITY OF CONSTRUCTION WORKS - ENVIRONMENTAL PRODUCTSDECLARATIONS - CORE RULES FOR THE PRODUCTSCATEGORY OF CONSTRUCTION PRODUCTS
- EUROPEAN DIRECTIVE 2008/98/EC
- GENERAL PROGRAMME INSTRUCTIONS OF THE INTERNATIONAL EPD® SYSTEM. VERSION 3.01
- ISO 14025 ENVIRONMENTAL LABELS AND DECLARATIONS - TYPE III ENVIRONMENTAL DECLARATIONS - PRINCIPLES AND PROCEDURES
- ISO 14044 ENVIRONMENTAL MANAGEMENT – LIFE CYCLE ASSESSMENT – REQUIREMENTS AND GUIDELINES
- PCR 2019:14 CONSTRUCTION PRODUCTS (EN 15804: A2), UN CPC CODE 54; VERSION 1.11

CONTACT INFORMATION

EPD owner:



Mapei AS

www.mapei.com/NO-NO/

LCA author:



Mapei SpA

www.mapei.it;
Environmental Sustainability Office

Programme operator:



The International EPD® System

Address: EPD International AB
Box 210 60
SE-100 31 Stockholm
Sweden

Website: www.environdec.com
E-mail: info@environdec.com

HEAD OFFICE

MAPEI SpA

Via Cafiero, 22 - 20158 Milan

Tel. +39-02-37673.1

mapei.com

mapei@mapei.it



ANNEX 1

ANNEX 1: Self declaration from EPD owner

Specific Norwegian requirements

1 Applied electricity data set used in the manufacturing phase

The electricity mix for the electricity used in manufacturing (A3) is the electricity grid mix

<0,030 kg CO₂ eqv/kWh>

2 Content of dangerous substances

- The product contains no substances given by the REACH Candidate list or the Norwegian priority list.
- The product contains substances that are less than 0.1% by weight given by the REACH Candidate or the Norwegian priority list.
- The product contains dangerous substances more than 0.1% by weight given in the REACH candidate list or the [Norwegian Priority List](#), concentrations is given in the EPD:

Dangerous substances from the REACH candidate list or the Norwegian Priority List	CAS No.	Quantity (concentration, wt%/FU(DU)).
Substance 1		
Substance n		

3 Transport from the place of manufacture to a central warehouse

Transport distance, and CO₂-eqv./DU from transport of the product from factory gate to central warehouse in Oslo shall be given. The following table shall be included in the EPD:

Type	Capacity utilisation (incl. return) %	Type of vehicle	Distance km	Fuel/Energy use	Unit	Value (l/t)	kg CO ₂ -eqv./DU
Boat							
Truck	85	27 tonn, EURO 5	95	0,0165	l/tkm	1,591	4,64E-03
Railway							
Rail							
Air							
Total	85	27 tonn, EURO 5	95	0,0165	l/tkm	1,591	4,64E-03

4 Impact on the indoor environment

- Indoor air emission testing has been performed; specify test method and reference:
- No test has being performed
- Not relevant; specify : the product is a waterproofing membranes for underground structures. It does not affect the indoor air quality.
